




Electret Condenser Microphone Unit EM8003FPD


1. Specification:

- 1-1) Directivity [方向特性] Omni Directional
- 1-2) Sensitivity [靈敏度] $-38.5 \pm 2.0\text{dB}$, (at $f = 1\text{kHz}$, $0\text{dB} = 1\text{V/Pa}$) Pressure Field Setup ($L=0\text{mm}$)
(Red Marking)
 $V_{cc} = 1.5\text{V}$, $R_L = 2.0\text{k}\Omega$
- 1-3) Output Impedance [阻抗] Less than $2.0\text{k}\Omega \pm 30\%$, (at $f = 1\text{kHz}$)
- 1-4) S/N Ratio [信噪比] More than 60.0dB , (at $f = 1\text{kHz}$, $P_{in} = 1\text{Pa}$), (A Weighted)
- 1-5) Operating Voltage Range [工作電壓範圍] 1.5V ($1.0\text{V} \sim 10.0\text{V}$)
- 1-6) Current Consumption [電流消耗] Max. $300\mu\text{A}$
- 1-7) Maximum Input Sound Pressure Level [音壓] 120dB S.P.L. (at $f = 1\text{kHz}$)
- 1-8) Weight [重量] Max. 0.8g
- 1-9) Capacitor (Built in) [電容 (內置)] None
- 1-10) Cloth [布] No Cloth


2. Appearance and Dimension [mm]

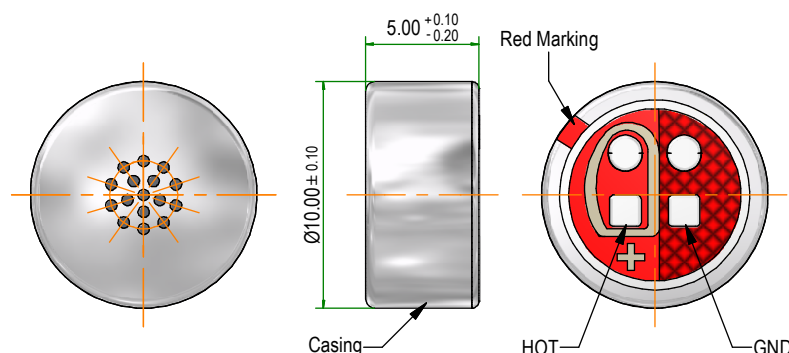

3. Electrical Circuit

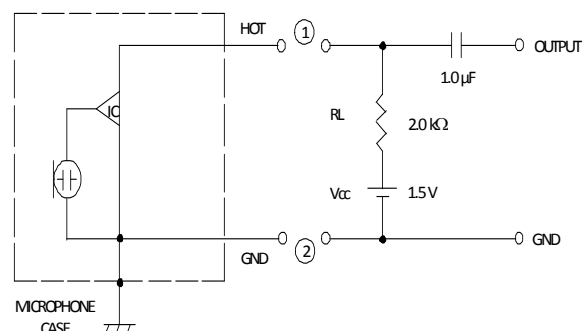

4. Frequency Response

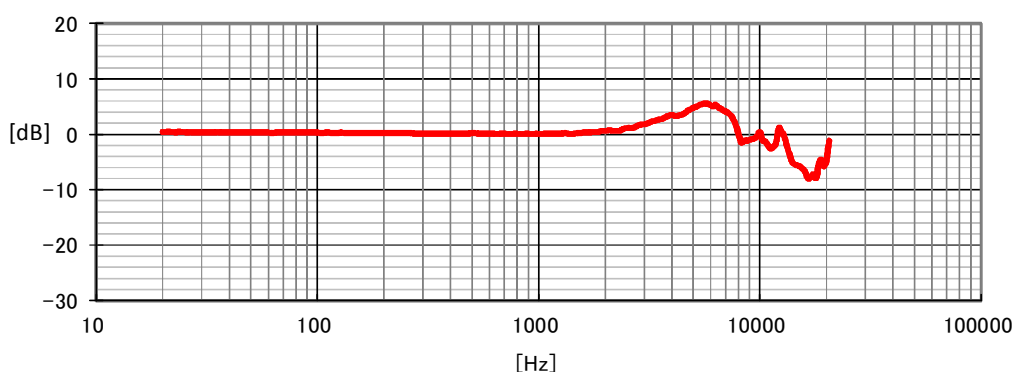

PRIMO MICROPHONES SINGAPORE (PTE) LTD

158 Kallang Way #06-07 PERFORMANCE BUILDING
SINGAPORE 349245

TEL: (65) 6747 3586 FAX: (65) 6744 3597

E-mail: pmsls@singnet.com.sg

Website: <http://www.primo.com.sg>

PRIMO MICROPHONES (HK) CO., LTD

Unit No. 815 - 816, 8/F, Shatin Galleria,
18 - 24 Shan Mei Street, Fotan, N.T. Hongkong

TEL: (852) 21449651 / 21449756 FAX: (852) 21449836

E-mail: pmhk@primomic.com.hk

May 2022